

# ALEGRA FREESTANDING BACK-TO-WALL CONTOUR SPA BATH INSTALLATION & OWNER GUIDE

#### Thank you for purchasing a Decina Alegra Freestanding Spa Bath.

This manual provides the correct steps and care advice for a safe and long lasting installation.

Manufactured from premium sanitary grade acrylic, Decina's freestanding spa baths are easy to install, with adjustable self-supporting feet & can be freely located anywhere in your bathroom.



**AG1500BTWCNW** (12 jets) 1500(L) x 800(W) x 590(H) mm **AG1700BTWCNW** (12 jets) 1700(L) x 800(W) x 590(H) mm

# THIS PRODUCT MUST BE INSTALLED BY A OUALIFIED TRADESMAN



#### PRE-INSTALLATION CHECKS

- Unpack & check the item is correct & no damage has occurred during transit.
- If there are any visible defects D0 NOT PROCEED WITH THE INSTALLATION & please contact the place of purchase immediately. <u>ANY CLAIMS FOR DAMAGE WILL NOT BE ACCEPTED</u> AFTER INSTALLATION.
- Protect your spa bath before & during installation, scratches &/or cracks &/or surface damage sustained during or after the installation are not covered by warranty.
- Installation must be in accordance with building regulations & local authority requirements.
- Electrical installation must comply with AS:3000 Electrical Wiring Rules.

# **MAINTENANCE**


# DECINA USES THE HIGHEST SANITARY GRADE ACRYLIC, HOWEVER NAKED FLAMES, CIGARETTES OR STRONG CHEMICALS SHOULD BE AVOIDED & REMOVED IMMEDIATELY TO PRESERVE THE HIGH GLOSS ACRYLIC SURFACE:

- When filling the bath start with cold water to allow the bath to gradually adapt to the temperature.
- After using your bath clean with a soft cloth & warm soapy water to clean any oils or soap, to prevent tide marks & preserve the polished surface.
- Clean using warm soapy water & only mild liquid detergents. Do not use powders, pastes, creams, chemicals, window cleaning sprays or abrasive cleaners.
- Cream cleaners may only be used to remove stubborn marks.
- Scratches can be removed with a fine polish like Brasso.
- 1 | DECINA INSTALLATION MANUAL

#### INSTALLATION STEPS

#### STEP 1.

Unpackage your freestanding bath. Check for damage and ensure your bath does not come in contact with any rough surfaces which may scratch your bath. Place your freestanding bath on cardboard or carpet during installation.

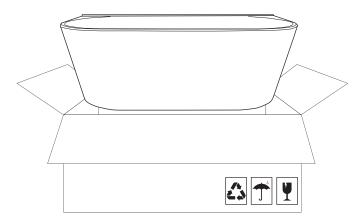

Check the contents of the carton include the following:

- Complete spa bath with the pipework and touch pad installed
- 2. Pump carton wrapped in foam
- 3. An installation kit consisting of:
  - a. Control cable for pump
  - b. 2 x 90'elbows
  - c.  $2 \times 10^{-2} \times 10^{-2}$
  - d. 1 x cover plate
- 4. A pop-down overflow kit
- 5. A pop-down waste with connector

If any of these items are missing, please immediately contact your retailer.


## STEP 2.

Place the freestanding bath in the correct position for installation.

Adjust the leveling feet until the bath base is 3-5mm above the finished floor. If measuring from the unfinished floor take into account the floor finishing thickness (such as tiles) into account. Turn the feet bolts and level accordingly.

Ensure there is 3-5mm of space between the bottom of the bath shell and the floor. Installing directly on the floor will place pressure on the outside wall of the bath, and will potentially crack the bath.

Ensure the bath is level so all water can drain to the waste outlet.

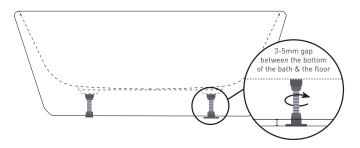


#### STEP 3

Carefully tilt the bath (or support in raised position) and install the overflow and waste as per manufacturers installation as provided in the cartons.

## **STEP 4 PUMP MOUNTING**


With the bath level set (and levelled) confirm the centre points for the  $2 \times 40$ mm couplings on the back of the spa. These are nominally 210mm and 295mm, but the measurements must be confirmed prior to proceeding.



measure centrepoints on the corresponding wall (again measuring from the same floor level) and drill 2 x 75mm (minimum) holes through the wall to the exterior, or the location where the pump will be located.


Determine the distance from the back of the bath to the other side of the wall, and cut 2\* pieces of 40mm pipe (not supplied) to be able to fit from inside the couplings on the back of the bath, through the wall, and have 100mm on the other side of the wall (this will be trimmed once installed through the wall) Glue these pipes into the couplings on the back of the bath.


Connect the controls lead to the touch pad on the pump, and feed the end with the rubber cap on it through the holes created above. Once this has been fed through, push the pipes through the holes, and the bath against the wall.

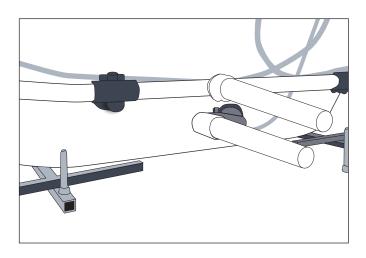


#### **INSTALLATION STEPS**

#### Connect the release coupling







With the bath in position, and the pipes through the wall, cut the pipes to be protruding the wall by 50mm, and glue on the male manifold couplings.



There should still be approx. 15mm from the inside of the coupling to wall to allow the cover plate to be installed.

Next, join the female half of the coupling to the 90 degree elbow supplied, and connect this to the male section of the coupling.






Measure the distance from the wall to the centre of the elbow. This is the centrepoint for the pump to be installed on.

# **STEP 5** INSTALL THE PUMP

Install the pump as per the installation manual provided with the pump.

#### **STEP 6** FIT THE COVER PLATE

Install the cover plate around the pipework (ensuring the notch for the cable aligns with the cable) as per the installation instructions provided with the cover plate.



#### **STEP 7** WATER TEST SPA

#### Water Testing Spa


Once the waste has been connected, and the spa is in position, fill the bath with water and let sit for 10 minutes. Inspect under the bath for any visible leaking. Start the spa pump and allow to run. After 10 minutes check for any visible leaking under the spa.

Allow the water to sit for a further 10 minutes and check for any visible leaking under the spa.

Drain the bath ensuring the water drains and there is no leaking through the flexible connector.

#### STEP 7

Once the above water testing has been completed, apply silicone along the bottom of the spa at the floor join.



#### **WARRANTY TERMS & CONDITIONS**

All Decina products are manufactured to the highest standards and guaranteed to be free of defects, subject to the conditions outlined below. In addition to the statutory rights given under Australian Consumer Law, Decina offers the following extended warranty periods from the date of purchase or handover:

PRODUCT	WARRANTY	TERMS
ALEGRA SPA BATH - Acrylic Shell	10 Years / 1 Year	Replacement Products / Parts & labour
SPA BATH PUMP	5 Years / 1 Year	Replacement Products / Parts & labour
SPA BATH JETS/FITTINGS	5 Years / 1 Year	Replacement Products / Parts & labour

The Decina warranty is only applicable when the product has been installed by a qualified tradesman, in full accordance with the installation instructions and statutory requirements. The warranty specifically EXCLUDES damages discovered AFTER installation.

Decina's responsibility for claims relating to impact damage ceases within 48 hours after delivery to the Decina re-seller's store.

The extended warranties only apply to faults or defects in the product arisen solely from faulty materials or workmanship in the products and does not apply to other defects for example from; damage, abuse, neglect or changes to the product supplied.

The warranty only extends to the supply of a replacement product or credit to the value of the purchase and excludes consequential damage ensuing from the product application or use. The responsibility for the removal and replacement of the product is with the installer and/or owner. Where the manufacturer "Decina" accepts that the product is at fault, the maximum contribution to the removal and replacement costs will be \$500.

Repairs of the Products other than by a Decina accredited or licensed service agent or technician are not covered.

In addition to this extended warranty, certain legislation (including the ACL) may give you certain rights which cannot be excluded, restricted or modified, this extended warranty must be read subject to such legislation and nothing in this warranty has the effect of excluding, restricting or modifying those rights.

To make a warranty claim, please visit the Decina website decina.com.au/warranty-claim/ or email services@decina.com.au and attach the following documentation:

- Proof of purchase (original invoice from the supplier)
- Details of the warranty claim including the date of installation, installer's details and head contractors
- Your contact details

If the Product has not been installed, please contact Decina to inspect the Product. If the claim is accepted, the Product can be returned or exchanged. Note: The extended warranty only applies to the original owner and is not transferable. Decina reserves the right to charge a service fee for any staff called to attend premises where products have been installed and the warranty claim is not authorised.

Copyright Feb 2019. Decina Bathroomware Pty Ltd. ABN 39845 084 033

# PLEASE LEAVE THIS MANUAL WITH THE END USER



